


PROGRAMOVANIE:

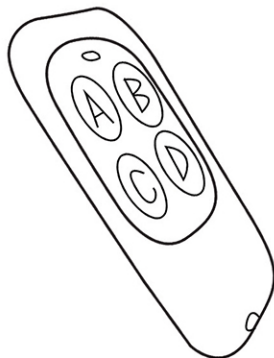

1. Potlačíme tlačidlo A, a za jeho stáleho držania 4x za sebou potlačíme tlačidlo B. (LED bliká každé 2 sekundy- ovládač je v programovacom režime)

2. Na ovládači TXD-M stlačíme a pustíme tlačidlo na ktoré chceme kód nakopírovať. (ak je kopírovanie úspešné, LED zasvieti na 3 sek)

3. K ovládaču TXD-M priložíme na dotyk originálny ovládač (alebo ovládač ktorý je už naladený na bránu) a potlačíme tlačidlo z ktorého chceme kód skopírovať na cca. 3sekundy.(LED bude blikať rýchle) Ak je Váš ovládač v tabuľke označený AMC, je potrebné pokračovať bodom 4.

4. Je potrebné byť v blízkosti motora z ktorého kód kopírujete. Následne stlačíte a držíte stlačené tlačidlo na ovládači TXD-M, na ktoré ste kód nahrali asi 10 sekúnd, až pokiaľ LED dióda nezačne blikať. Následne tlačidlo uvoľníme a čakáme pokiaľ LED nezhasne. Kopírovanie je takto ukončené.

ACM	TX2, TX2 COLOR, TX4
ADYX	AMC TE4433H BLUE, 433-HG BRAVO
AERF	COMPACT, HY-DOM, MERCURI B, MERCURI C, SABUTON, MARS, SATURN, ST3/N, TERRA, TMP-1, TMP-2, UNITECH
ALLMATIC	AMC BROWN, BROWN RED, BRO.OVER, PASS, MINIPASS, TECH3
APERIO	GO, GO PRO, GO MINI
APERTO (Sommer)	TX02-868-2 BLUE, 4025 TX02-868-2, TX02-434-2, 4022 TX02-434-2, TX-03-868-4, 4020 TX03-434, 4013, TX03-434-4
APRIMATIC	AMC TR2, TR4, TM4, TXM
ATA	PTX4 BLUE, PTX4 PINK
AVIDSEN	104251, 104250, 104250 OLD, 104250 RED, 104257, 104350, 654250
BALLAN	FM400, FM400E, FM404B, 4013
BENINCA	AMC TO GO. WV, TWV, ROLLKEY, APPLE, LOT WCV, CUPIDO, TO.GO. QV, IO, LOT2WCV, LOT1W, LOT2W, LOT4W, LOT1WM, LOT2WM, T2W, T4W
BESIDE	BEZAP, HIT
BFT	AMC MITTO, MITTO M(MITTO2M/MITTO4M), MITTO RCB(MITTO RCB02/RCB04) MITTO A (MITTO 2A/MITTO 4A), MITTO B, TRC(TRC2/TRC4), GHIBLI, MURALE, KLEIO, TE01, TE02, TE04, RB4 MURALE
CAME	T431, T434, TOP432A, TOP434A, TOP432, TAM432SA, TOP432NA, TOP432EE, TOP432EV

CARDIN	AMC TRQ 5449 (TRQ449100/TRQ449200/TRQ449300/TRQ449400), TRQ 5449 GREEN (PRECODE), TXQ 5449 (TXQ449200/TRQ449300/TRQ449400), TXQ 5449 GREEN, TRQ 5486 (TRQ486200/TRQ486400), TXQ 5486 (TRQ486200/TRQ486400), S437 TX, XRADO, S449, S476TX2, S476TX, S486
CASALI	JA33 AMIGO, GENIUS/CASALI A252RC
CASIT	ERTS92B, ERTS92T, ERTS476D, ERTS20DQ, ERTS476D, ERTS476Q
CELISA	S10 1, S10 2
CENTURION	CLASSIC, SMART
CHAMBERLAIN LIFT MASTER MOTOR LIFT	953ESTD, 371 LM, 971 LM, 84330E, 94334CE, 94333E/94334E/94335E, 9747E, 1A5639-7, 1A5477, 1A6487, 132B2372, 94330EML/94333EML/94335EML, 84330EML/84333EML/84335EML, 8747EML
CLEMSA	MUTANCODE, T, T-8, E-CODE N, MASTERCOD MV
CPS	TCP3, CPS1, TCP3, CPS2, TCP3, CPS4, TCP3
DASPI	AMC HAPPY2, POPS 2, ZERO RC/ ZERO 2RC, ZERO 4RC)
DEA SYSTEM	TR MIO, 133 1, 433 2, 433 4, GENIE, PUNTO S2, PUNTO 278, GOLDR, GENIE R 273, GENIE R-GT2N
DELMA	MIXARD 433 1, MIXARD 433 2, KING 433 2
DICKERT	MAHS433 01, MAHS433 04
DITEC	AMC GOL, GOL4C, BIXLS2, BIXLP2, BIXAG4, BIXLG
DOITRAND	MPSTF2E, JAUNE
DOORMATIC	SAW
DOORHAN	AMC TRANSMITTER 4
DUCATI	TSAW1, TSAW2, TSAW3, 124, TE2
ECOSTAR	RSE, RSC, RSZ
ELBE	501, 502, 504, 502A, 504A
ERREKA	ERREKA IRIS, ROLLER 2, ROLLER 433, ROLLER 868, SOL433, SOL868, VEGA 433, VEGA 868
ELCA	IRIS, ASTER 2, ASTER 1000, ASTER 1001
FAAC	AMC XT4 433 RC, TM1 433 DS, TM2 433 DS, TM3 433 DS, 433L2, 433L4, TM22 433 SLP, TM4 433 SLP, TML 433SLH, TML 868 SLH, DL 868 SLH, XT 868SLH, XT 433 SLH, T 868 SLH, T 433 SLH, XT 433 RC, TE433HG
FADINI	AMC JUBI-SMALL, 433 M2, ASTRO 433-2, ASTRO 433-4, JUBI2/JUBI4
FERPORT	TAC1, TAC2, TAC4, TAC 1K, TAC 2K, TAC 4K, TAC2KR
GIBIDI	OPEN TMB, OPEN OUT, AU1600, AU1600 WOOD, AU1680, AU1680 WOOD, DOMINO, AU01590, GIBIDI AU1610, AU1810, AU03000, DTC 4334
GULLIVER	MDW
GENIUS	AMC AMIGO, AMIGOLD, KILO, BRAVO, ECHO
GENIE	AMC G1TR-3, GIT, G1CT390, G1FT390-1, G3T-BX, G1T-BX, GM3T, G1CTD, G1FTD
HORMANN	HSM2, HSM4
JCM	NEO, TWIN, GO, GO PORTIS, GO NORTON
JAY	UBEI X1SL1, UBE1 11, UBE1 21, UBE1 31, UBE1 41, UBE1 61
KBLUE	ETH-TEL01
KEY	900TXB-42R, SUB44, TXB-44R, TXG-44R

KING GATES	STYLO, CLIPPER
KLING	KUA, KUA E, KUA S
LABEL	SPYCO, RJW4E
LEB	TMW
LINCE	LR2035
LIFE	FIDO
LINEAR	MCT-11, ACT-21, ACT-22, STING RAY ACT-31, STING RAY ACT-34B
MHOUSE	AMC Tx4, TX3, GTX4
MA	TX1, TX2, TX3
MARATEC	D101, D12, DIGITAL302, DIGITAL304
MERLIN PROLIFT	M230T (PROLIFT), M430R (PROLIFT), M842 (GREEN REMOTE), M832 (GREEN REMOTE), M844 (GREEN REMOTE), C945, C940, C943
MERLIN2.0	E945M, E943M, E940M
MOOVO	AMC MT4G
MONSEIG -NEUR	ARC
NICE	AMC SMILO, FLOR-S, VERY-VR, INTI, FLO2, FLO4, FLOR-S ERA, ONE (ON), ON ERA, ERGO, PLANO, ONE (ON FM)
NORTON	NEO, TXCD, GO NORTON, GO MINI NORTON
NOVOTEC-NICA	BIXL2
NOVOFERM	NOVOTRON 502-504-512MIX43-2, MTR40-2, MCHS43-2, MH543(2-4), MNHS433(2-4), MCHS, MINI-NOVOTRON 504, MICRO-NOVOTRON 502, MICRO-NOVOTRON 504, MICRO-NOVOTRON 31, MICRO-NOVOTRON 51, MINI-NOVOTRON 30, MINI-NOVOTRON 50, MNHS
NOLOGO	ECO DIP
NORMSTAHL	T433
O & O	AMC T.COM, TWIN, TX, TWIN, TX2/TX4(NEO), T.COM R4-2/T.COM R4-4, T.COM R8-2/T.COM R8-4
OG	OG62, OG64
OPENOUT	TMQ
PECCININ	TX MENBRANA
PORTAMATIC	MPH01, MPH02
PRASTEL	AMC TC2E(4E), SLIM, BFOR, MPSTP2E, MPSTF2, MPSTF4, MPSTF2RE, MPSTF4RE, MPSTP2E, MPSTP2E BLUE, MTE(MT4E, MT2E), TRQ-P(TRQ4P, TRQ2P), MPSTLE(MPSTL-1E, MPSTL-2E, MPSTL-4E)
PROEM	ER4C4ACS
PROGET	ETY 433N2, ETY 433N4
PROTECO	TX433, EUROMATIC
PUJOL	MARTE, P215, TWIN, VARIO, VARIO MARS, VARIO OCEAN, NEO
QUASAR	433
RIB	LITHIO
ROPER	NEO, GO ROPER, GO MINI ROPER
SABUTOM	BROOVER, BROSTAR
SEA	SMART DIP

SEAV	BE HAPPY RS(BE-HAPPY-RS1, BE-HAPPY-RS2, BE-HAPPY-RS3), BE-SMART RSX, BE-HAPPY RH1, BE-HAPPY RH2, BE-HAPPY RH3
SECULUX	NEO
SILVELOX	Mhz 2007, QUARZ SAW
SICE	4790207
SIMINOR	CVXNL, MITTO, SIM433, S433(2T-4T), ER2C4ACS, ER4C4ACS
SECURVERA	SV R2C, SV R4C, SV R6C
SERAI	OG/52, OG54, OG82, OG84, OG/28, OG48, OG62, OG64
SOMFY	TELIS, K-EASY, K-EASY NEW, K-EASY OLD, MITTO, KEY GO RTS, TELIS RTS, KEYTIS RTS, KEYTIS RTS NS, ALARMA
SOMMER	4010, 4011, 4014 TX03-434-2, 4013 TX03-434-4, 4020 TX03-868-4, 4026 TX03-868-2, 4022 TX02-434-2, 4025 TX02-868-2, 4031 TX08-868-4
STAGNOLI	KALLISTO, VENUS AV223
TAU	AMC 250K-SLIMRP, 250K-SLIMR, 250T-4RP
TELCOMA	FM 402, FM 402 E, FM400E, FM400
TOR	LIFT TORMIT4
VDS	AMC TRQ P, ECO-R
VRAWFORD	Ea433 4K, SMART2, SMART3
V2	PHOENIX 433-868, TXC, TSC, TRC, HANDY, SERIE ROYAL: TRR/43, TRR2/43, TRR4/43, PHOX 433